

SUBMITTAL

Project

Kerr Stock Equipment

Date

Tuesday, July 18, 1905

Designer

applied@kerrcontrols.ca

Notes

KERR STOCK EQUIPMENT

Kerr Applied

Table Of Contents

Project: Kerr Stock Equipment 10/24/2026
Prepared By: Kerr Applied 01:52PM

50FE-QA05A2A1-0A0A0 ..... **3**
Unit Report 4
Certified Drawing 5
Performance Summary 8
Guide Specifications 11
Unit Feature Sheet 28
Spec Sheet 29

50FE-QA05A2A1-0A0A0

Tag Cover Sheet
Unit Report
Certified Drawing
Performance Report
Guide Specification
Unit Feature Sheet
Spec Sheet

Unit Report For 50FE-QA05A2A1-0A0A0

Project: Kerr Stock Equipment
Prepared By: Kerr Applied

10/24/2026
01:52PM

Unit Parameters

Unit Model: **50FEQA05A2A1-0A0A0**
Unit Size: **05 (4 Tons)**
Volts-Phase-Hertz: **575-3-60**
Heating Type: **Heat Pump**
Refrigerant: **R-454B**
Duct Cfg: **Vertical Supply / Vertical Return**
DX Options: **One Stage Cooling (04-06)**

Dimensions (ft. in.) & Weight (lb.) ***

Unit Length: **6' 2.375"**
Unit Width: **3' 10.625"**
Unit Height: **2' 9.375"**
Total Operating Weight: **473** lb

*** Weights and Dimensions are approximate. Weight does not include unit packaging. Approximate dimensions are provided primarily for shipping purposes. For exact dimensions and weights, refer to appropriate product data catalog.

Lines and Filters

Return Air Filter Type: **Throwaway**
Return Air Filter Quantity: **2**
Return Air Filter Size: **16 x 25 x 2**

Selection includes construction throwaway filter into the base fan curve.

Unit Configuration

Standard/Medium Static - EcoBlue Vane Axial Fan
Al/Cu - Al/Cu
Standard Electromechanical Controls (can be used with field installed economizers and dampers)
Standard Packaging
No
UL60335-2-40 approved R-454B Dissipation board and leak sensor included as standard

Warranty Information

5-Year compressor parts (STD.)
1-Year parts (STD.)

No optional warranties were selected.

NOTE: Please see Warranty Catalog 500-089 for explanation of policies and ordering methods.

Ordering Information

Part Number	Description	Quantity
50FEQA05A2A1-0A0A0	Rooftop Unit	1
	Base Unit	
	Electromechanical control, No intake or exhaust option.	

NOTES:

1. DIMENSIONS ARE IN INCHES, DIMENSIONS IN [ ] ARE IN MILLIMETERS.
2. CENTER OF GRAVITY
3. DIRECTION OF AIR FLOW
4. ALL VIEW DRAWN USING 3RD ANGLE

UNIT	J	K
50FEQ*04	33 3/8 [847]	18 5/8 [472]
50FEQ*05	33 3/8 [847]	14 7/8 [377]
50FEQ*06	41 3/8 [1051]	14 7/8 [377]
50FEQ*07	41 3/8 [1051]	14 7/8 [377]

Carrier


THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER CORPORATION'S WRITTEN CONSENT.


SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.


	CONNECTION SIZES
A	1 3/8" [35] DIA FIELD POWER SUPPLY HOLE
B	2" [51] DIA POWER SUPPLY KNOCKOUT
C	1 3/4" [44] DIA GAUGE ACCESS PLUG
D	7/8" [22] DIA FIELD CONTROL WIRING HOLE
E	3/4"-14 NPT CONDENSATE DRAIN
G	2 1/2 " [64] DIA POWER SUPPLY KNOCK-OUT


THRU-THE-BASE CHART
THESE HOLES REQUIRED FOR USE CRBTMPWR008A00, 009A00

	THREADED CONDUIT SIZE	WIRE USE	REQ'D HOLE SIZES (MAX.)
W	1/2"	115V	7/8" [22.2]
X	1/2"	24V	7/8" [22.2]
Y *	3/4"	POWER	1 1/8" [28.6]
Z**	(009A00) 1/2" FPT	GAS	1 1/8" [28.6]
	FOR "THRU-THE-BASEPAN" FACTORY OPTION, FITTINGS FOR ONLY X,Y, & Z ARE PROVIDED		
*	SELECT EITHER 3/4" OR 1/2" FOR POWER, DEPENDING ON WIRE SIZE		
**	(008A00) PROVIDES 3/4" FPT THRU CURB FLANGE & FITTING.		

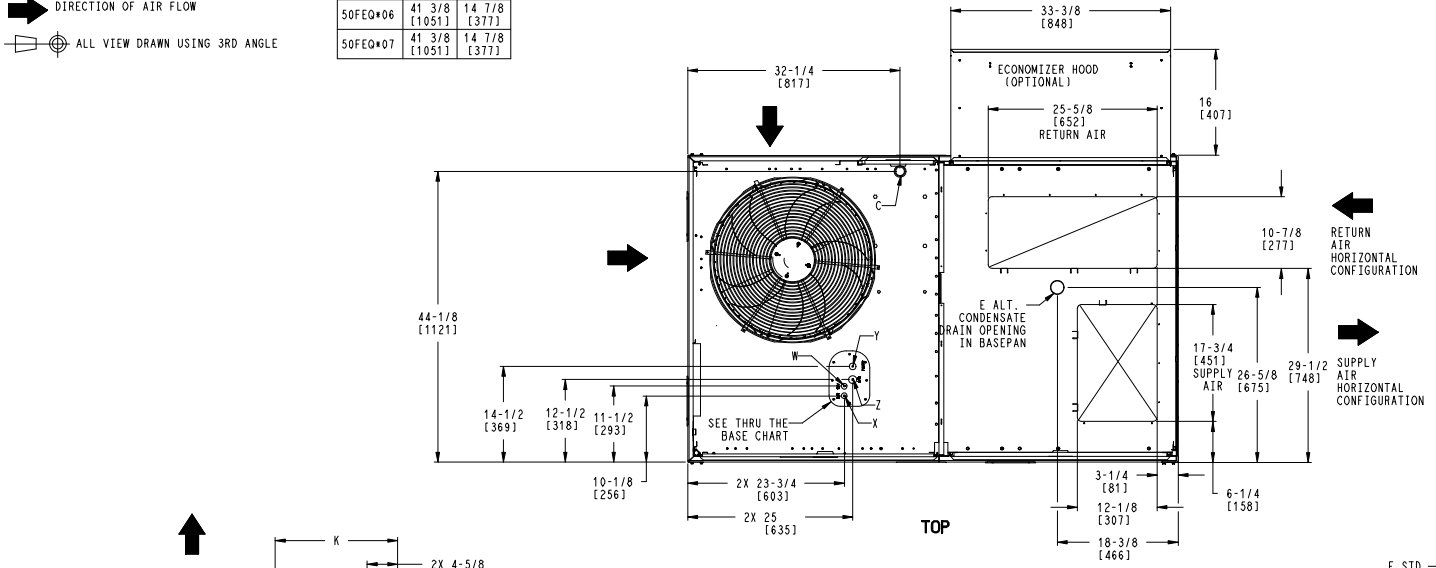

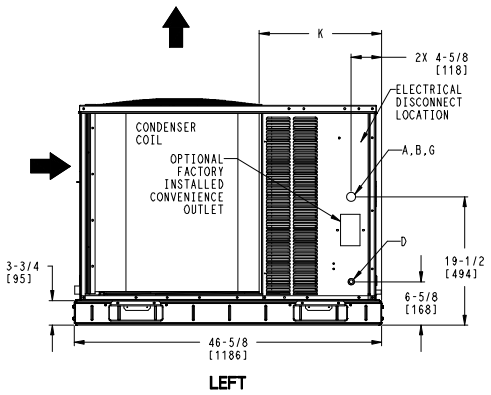

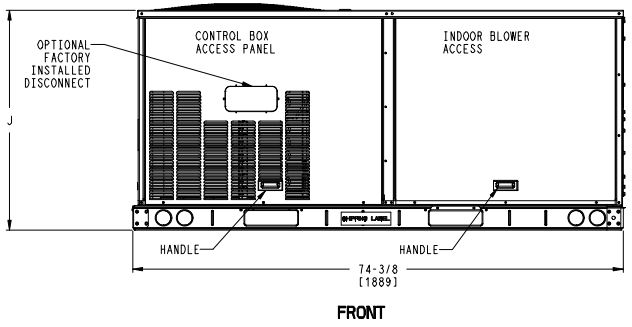

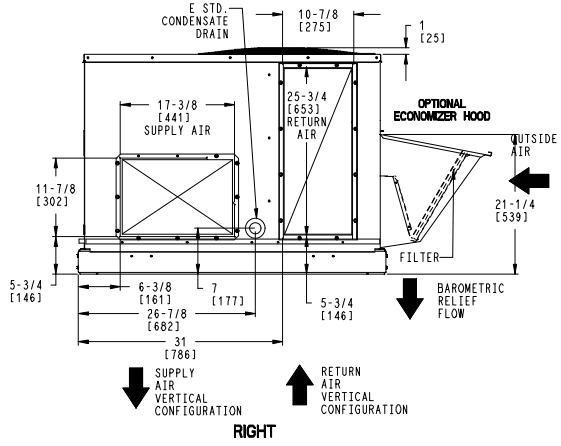

ITC CLASSIFICATION	SHEET	DATE	SUPERCEDES			REV
U.S. ECCN:NSR	1 OF 3	08/30/24	01/17/24	50FEQ 04-07 SINGLE PACKAGE HEAT PUMP	48TC007000	A


UNIT	STD. UNIT WEIGHT*		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C.G.		HEIGHT
	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z
50FEQ*04	476	216	128	58	120	54	110	50	118	54	36 [914]	22 3/8 [568]	16 1/8 [410]
50FEQ*05	473	215	127	58	119	54	110	50	117	53	36 [914]	22 3/8 [568]	16 1/8 [410]
50FEQ*06	584	265	158	72	145	66	134	61	147	67	35 1/2 [902]	22 1/2 [572]	16 1/2 [419]
50FEQ*07	589	267	161	73	146	66	134	61	147	67	35 3/8 [898]	22 5/16 [557]	16 1/2 [419]

* STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT AND WITHOUT PACKAGING.
FOR OTHER OPTIONS AND ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.


Carrier

THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER CORPORATION'S WRITTEN CONSENT.


SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.

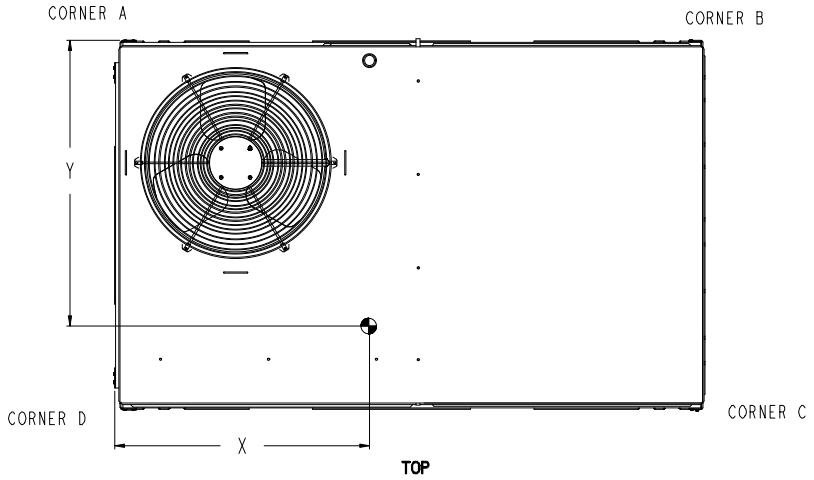

TOP

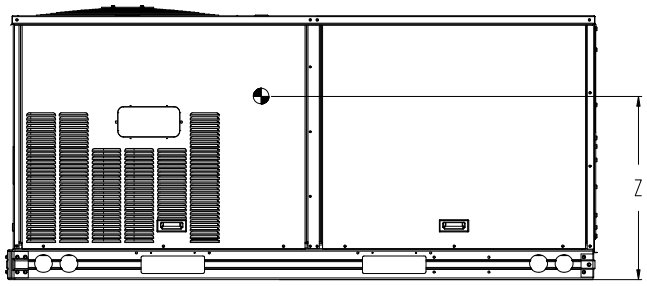

FRONT

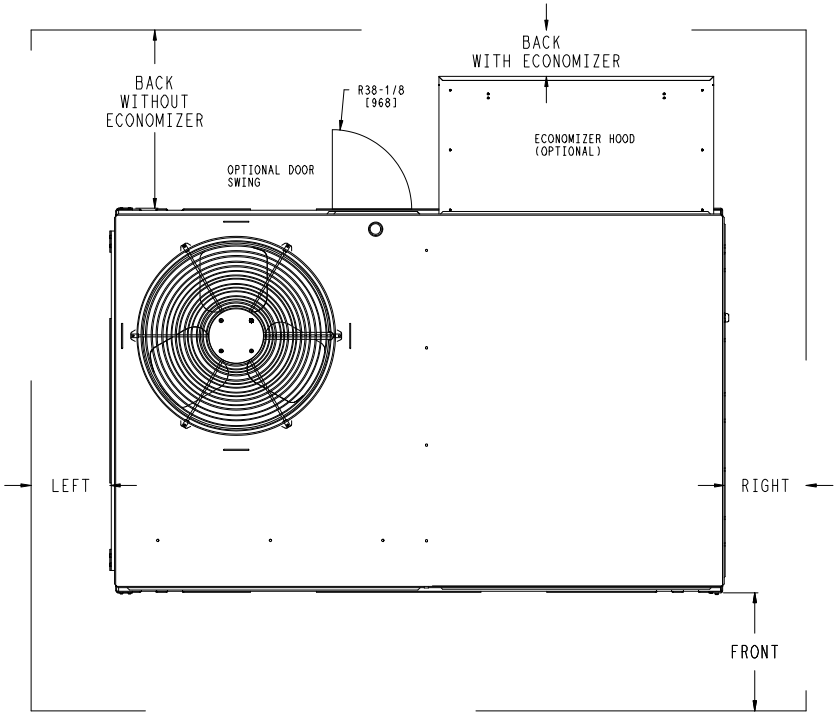

NOTE:

1. FOR ALL MINIMUM CLEARANCES LOCAL CODES OR JURISDICTIONS MAY PREVAIL.


CLEARANCE			
	SERVICE WITH:	SERVICE WITH:	OPERATING
SURFACE	CONDUCTIVE BARRIER	NONCONDUCTIVE BARRIER	CLEARANCE
FRONT	48 [1219mm]	36 [914mm]	18 [457mm]
LEFT	48 [1219mm]	42 [1067mm]	18 [457mm]
BACK W/O ECON	48 [1219mm]	42 [1067mm]	18 [457mm]
BACK W/ECON	36 [914mm]	36 [914mm]	18 [457mm]
RIGHT	36 [914mm]	36 [914mm]	18 [457mm]
TOP	72 [1829mm]	72 [1829mm]	72 [1829mm]


ITC CLASSIFICATION	SHEET	DATE	SUPERCEDES			REV
U.S. ECCN:NSR	2 OF 3	08/30/24	01/17//24	50FEQ 04-07 SINGLE PACKAGE HEAT PUMP	48TC007000	A

Carrier

THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS DELIVERED UPON THE EXPRESS CONDITION THAT THE CONTENTS WILL NOT BE DISCLOSED OR USED WITHOUT CARRIER CORPORATION'S WRITTEN CONSENT.


SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.

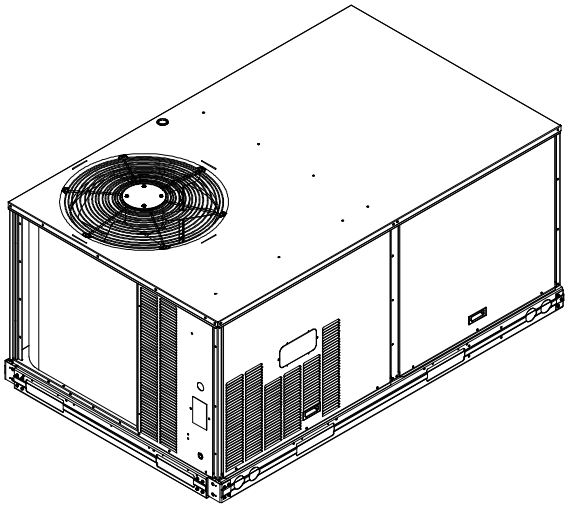

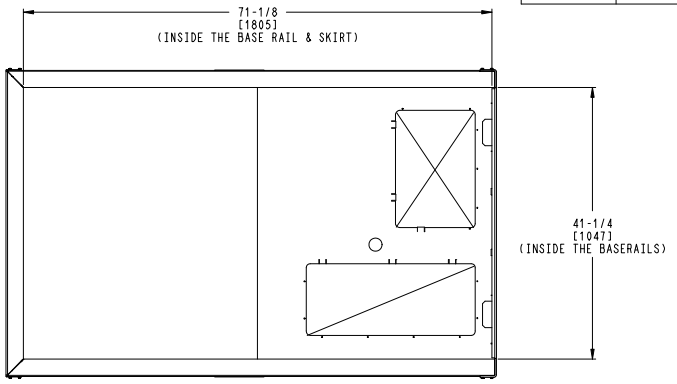


INSIDE BASERAIL DIMENSIONS


BOTTOM

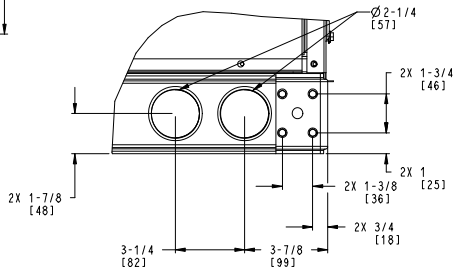


DETAIL **C**
TYP 4 PLCS

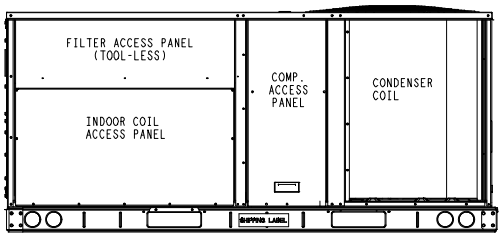

BACK



LEFT

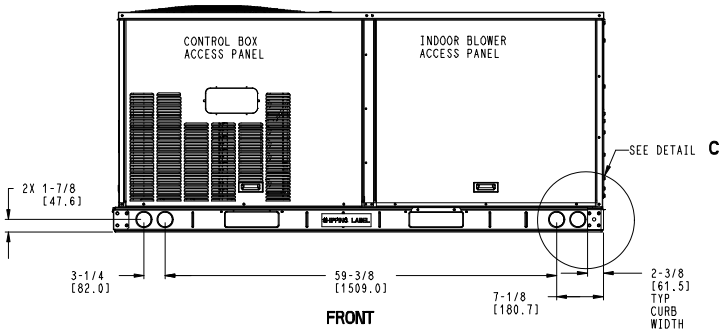

FRONT

ITC CLASSIFICATION	SHEET	DATE	SUPERCEDES			REV
U.S. ECCN:NSR	3 OF 3	08/30/24	01/17/24	50FEQ 04-07 SINGLE PACKAGE HEAT PUMP	48TC007000	A

Part Number:50FEQA05A2A1-0A0A0

Refrigerant:	**R-454B**	
ARI SEER2:	**13.40**	
ARI EER2:	**11.50**	

Base Unit Dimensions

Unit Length:	**74.4**	in
Unit Width:	**46.6**	in
Unit Height:	**33.4**	in

Operating Weight

Base Unit Weight:	**473**	lb
Total Operating Weight:	**473**	lb

Unit

Unit Voltage-Phase-Hertz:	**575-3-60**	
Air Discharge:	**Vertical**	
Fan Drive Type:	**Vane Axial**	
Actual Airflow:	**1600**	CFM
Site Altitude:	**100**	ft

Cooling Performance

Condenser Entering Air DB:	**95.0**	F
Evaporator Entering Air DB:	**80.0**	F
Evaporator Entering Air WB:	**67.0**	F
Entering Air Enthalpy:	**31.50**	BTU/lb
Evaporator Leaving Air DB:	**57.3**	F
Evaporator Leaving Air WB:	**56.9**	F
Evaporator Leaving Air Enthalpy:	**24.36**	BTU/lb
Gross Cooling Capacity:	**51.21**	MBH
Gross Sensible Capacity:	**39.09**	MBH
Compressor Power Input:	**3.45**	kW
Coil Bypass Factor:	**0.082**	

Heating Performance

Outdoor Ambient Temperature:	**47.0**	F
Entering Air Indoor Coil DB:	**70.0**	F
Leaving Air Indoor Coil DB:	**96.9**	F
Total Heating Capacity:	**46.35**	MBH
Integrated Heating Capacity:	**46.35**	MBH
Heating Power Input:	**3.60**	kW
High Temperature COP:	**3.60**	
Low Temperature COP:	**1.90**	
HSPF:	**7.8**	
High Temperature COP2:	**3.50**	
Low Temperature COP2:	**2.00**	
HSPF2:	**6.7**	

Supply Fan

External Static Pressure:	**0.50**	in wg
Fan RPM:	**1524**	
Fan Power:	**0.37**	BHP
NOTE:	**Selected IFM RPM Range: 1094 - 2170**	

Selection includes construction throwaway filter into the base fan curve. This filter is not MERV Rated.

Electrical Data

Voltage Range:	**518 - 633**	
Compressor #1 RLA:	**5.8**	

Compressor #1 LRA: **41**
Indoor Fan Motor Type: **MED**
Indoor Fan Motor FLA (Total): **1.5**
Power Supply MCA: **10**
Power Supply MOCP (Fuse or HACR): **15**
Disconnect Size FLA: **9**
Disconnect Size LRA: **45**
Electrical Convenience Outlet: **None**
Outdoor Fan [Qty / FLA (ea)]: **1 / 0.6**


Control Panel SCCR: 5kA RMS at Rated Symmetrical Voltage

Acoustics

Sound Power Levels, db re 10E-12 Watts

	Discharge	Inlet	Outdoor
63 Hz	87.4	87.2	85.6
125 Hz	77.2	72.9	84.7
250 Hz	71.0	69.1	80.5
500 Hz	67.4	58.5	76.0
1000 Hz	62.7	61.9	72.4
2000 Hz	59.4	52.2	68.0
4000 Hz	58.2	46.8	62.8
8000 Hz	56.6	40.7	59.3
A-Weighted	70.5	67.0	79.0

Advanced Acoustics

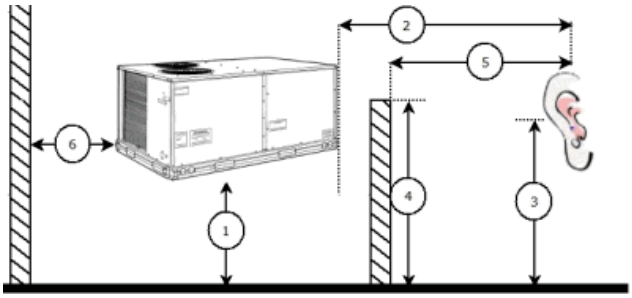

Advanced Accoustics Parameters

1. Unit height above ground: **30.0** ft
2. Horizontal distance from unit to receiver: **50.0** ft
3. Receiver height above ground: **5.7** ft
4. Height of obstruction: **0.0** ft
5. Horizontal distance from obstruction to receiver: **0.0** ft
6. Horizontal distance from unit to obstruction: **0.0** ft

Detailed Acoustics Information


Octave Band Center Freq. Hz	63	125	250	500	1k	2k	4k	8k	Overall
A	85.6	84.7	80.5	76.0	72.4	68.0	62.8	59.3	89.2 Lw
B	59.4	68.6	71.9	72.8	72.4	69.2	63.8	58.2	78.5 LwA
C	53.2	52.3	48.1	43.6	40.0	35.6	30.4	26.9	56.8 Lp
D	27.0	36.2	39.5	40.4	40.0	36.8	31.4	25.8	46.1 LpA

Performance Summary For 50FE-QA05A2A1-0A0A0

Project: Kerr Stock Equipment 10/24/2026
Prepared By: Kerr Applied 01:52PM

Legend
A Sound Power Levels at Unit's Acoustic Center, Lw
B A-Weighted Sound Power Levels at Unit's Acoustic Center, LwA
C Sound Pressure Levels at Specific Distance from Unit, Lp
D A-Weighted Sound Pressure Levels at Specific Distance from Unit, LpA

Calculation methods used in this program are patterned after the ASHRAE Guide; other ASHRAE Publications and the AHRI Acoustical Standards. While a very significant effort has been made to insure the technical accuracy of this program, it is assumed that the user is knowledgeable in the art of system sound estimation and is aware of the tolerances involved in real world acoustical estimation. This program makes certain assumptions as to the dominant sound sources and sound paths which may not always be appropriate to the real system being estimated. Because of this, no assurances can be offered that this software will always generate an accurate sound prediction from user supplied input data. If in doubt about the estimation of expected sound levels in a space, an Acoustical Engineer or a person with sound prediction expertise should be consulted.

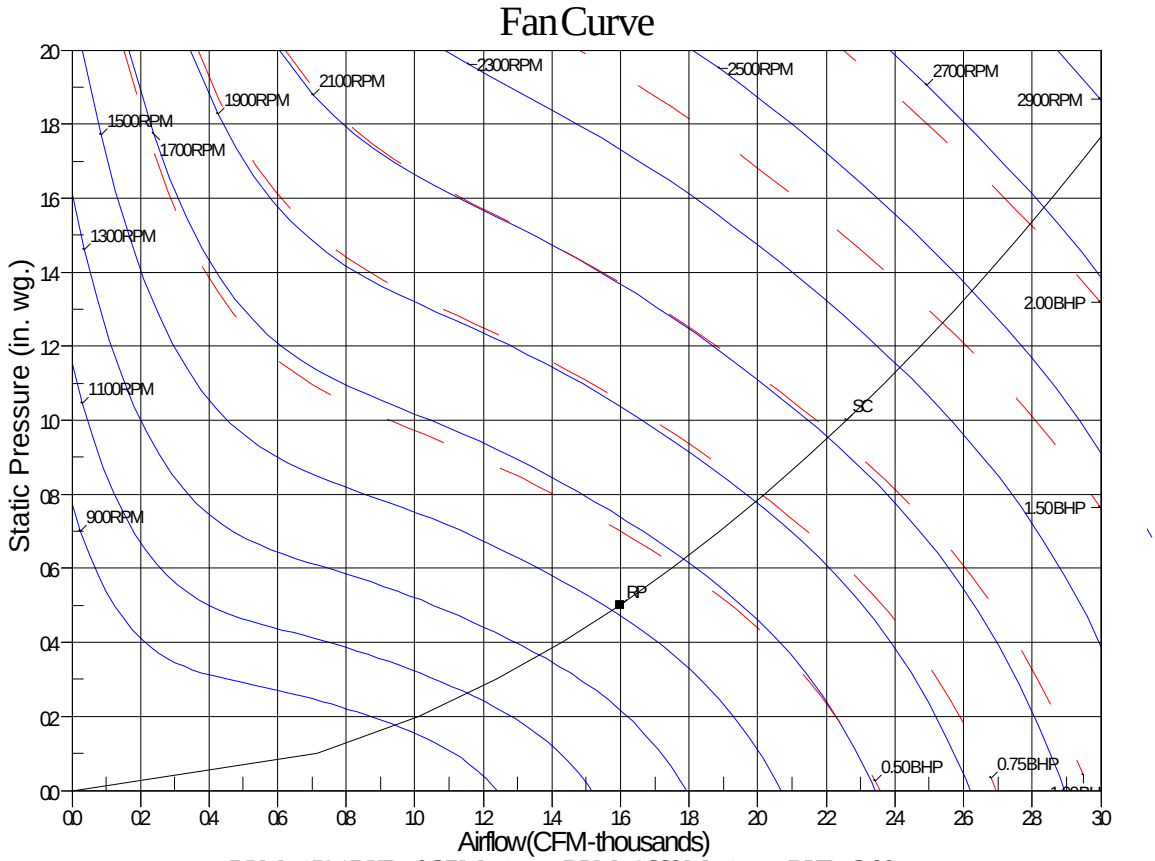

RPM=1524 BHP=0.37 Maximum RPM=2660 Maximum BHP=3.00
SC-System Curve RP-Rated Point

Note about this specification:

This specification is in the “Masterformat” as published by the Construction Specification Institute. Please feel free to copy this specification directly into your building spec.

Puron ADVANCE™

Heat Pump Packaged Rooftop

HVAC Guide Specifications

Size Range: **3 to 6 Nominal Tons**

Carrier Model Number: **50FEQ*04-07**

(23 06 80) Schedules for Decentralized HVAC Equipment

(23 06 80.13) Decentralized Unitary HVAC Equipment Schedule

(23 06 80.13.A.) Rooftop unit (RTU) schedule:

Schedule is per the project specification requirements.

(23 07 16) HVAC equipment insulation

(23 07 16.13) Decentralized, Rooftop Units:

(23 07 16.13.A.) Evaporator fan compartment:

1. Interior cabinet surfaces shall be insulated with a minimum 1/2 in. thick, minimum 1-1/2 lb density, flexible fiberglass insulation bonded with a phenolic binder, neoprene coated on the air side.

2. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.

(23 07 16.13.B.) Electric Heat Compartment:

1. Aluminum foil-faced fiberglass insulation shall be used.

2. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.

(23 09 13) Instrumentation and control devices for HVAC

(23 09 13.23) Sensors and Transmitters

(23 09 13.23.A.) Thermostats

1. Thermostat must

   a. energize both “W” and “G” when calling for heat.

   b. have capability to energize 1 or 2 stages of cooling, and 2 different stages of heating.

   c. be heat pump design and include capability for occupancy scheduling.

(23 09 23) Direct Digital Control system for HVAC

(23 09 23.13) Decentralized, Rooftop Units:

(23 09 23.13.A.) SystemVu™ intelligent integrated Direct Digital Control (DDC) shall provide:

1. Integrated unit operation for comfort cooling, heating ventilation as well as all monitoring, recording and reporting capabilities. Controller shall also provide diagnostics and alarms of abnormal unit operation through the controller. Controller shall have an intuitive user display and be able to be used in a standalone operation or via building automation system (BAS).

2. Quick Unit Status LEDs of: Run — meaning all systems are go, ALERT — that indicates there is currently a non-critical issue with the unit, like filters need to be replaced and FAULT — that indicates the unit has a critical issue and will possibly shut down.
3. Six large navigation keys for easy access. Navigation keys shall consist of: TEST, BACK, ENTER, and MENU along with UP and DOWN arrows.
4. Full back lit user display with 4 line by 30 character text capabilities. Display menu shall be designed to provide guided major menus and sub menus main menus provided below:
    a. Shutdown Unit
    b. Run Status
    c. Settings
    d. Alerts/Faults
    e. Service
    f. Inputs
    g. Outputs
    h. USB
5. The capability for standalone operation with conventional thermostat/sensor or use with building automation systems (BAS) of Carrier i-Vu®, BACnet, and Carrier Comfort Network® (CCN) systems. No special modules or boards are required for these capabilities. Has the capability to work with Equipment Touch™ and System Touch™ devices and ZS Sensors.
6. The ability to read refrigerant pressures at display or via BAS network of; Discharge Pressure and Suction Pressure. The need for traditional refrigerant gauges is not required.
7. USB Data Port for flash drive interaction. This will allow the transfer of data for uploads, downloads, perform software upgrades, back-up and restore data and file transfer data such as component number of starts and run hours.
8. Reverse Rotation Protection of compressors if field 3-phase wiring is misapplied.
9. Provide Service Capabilities of:
    a. Auto run test
    b. Manual run test
    c. Component run hours and starts
    d. Commissioning reports
    e. Data logging
    f. Alarm history
10. Economizer control and diagnostics. Set up economizer operation, receive feedback from actuator. Also meets the most recent California Title 24, ASHRAE 90.1 and IECC Fault Detection and Diagnostic (FDD) requirements.
11. Unit cooling operation down to 40°F (4°C).
12. Controller shall have easy access connections around the controller perimeter area and consist of Mate-N-Lok, terminal block and RJ style modular jack connections.
13. 365 day real time clock, 20 holiday schedules along with occupied and unoccupied scheduling.
14. Auto-Recognition for easy installation and -commissioning of devices like economizers, space sensors etc.
15. A 5°F temperature difference between cooling and heating set points to meet the latest ASHRAE 90.1 Energy Standard.
16. Contain return air sensor, supply air sensor and outdoor air sensor to help monitor and provide data for the unit comfort operation, diagnostic and alarms.

17. Use of Carrier's field accessory Equipment Touch and System Touch devices.
18. Supply Air Tempering control operates the gas or electric heat to maintain a minimum supply air temperature during conditions where very cold outdoor air causes the supply air temperature to fall below the configured Supply Air Tempering Setpoint. This occurs during periods where DCV is active and increasing the amount of outdoor air or in cases where the system is operating at very low airflow and the calculated economizer position has increased to maintain a constant ventilation rate.
19. Demand limiting in SystemVu™ is achieved through set point expansion. The systems heating and cooling set points are expanded in steps or levels. The degree to which the set points may be expanded is defined by the 6 demand level offsets and the 2 commanded demand limit levels.
20. 3-year limited part warranty.

(23 09 33) Electric and Electronic Control System for HVAC

(23 09 33.13) Decentralized, Rooftop Units:

(23 09 33.13.A.) General:

1. Shall be complete with self-contained low--voltage control circuit protected by a resettable circuit breaker on the 24-v transformer side. Transformer shall have 75VA capability.
2. Shall utilize color-coded wiring.
3. Shall include a Unit Control Board to conveniently and safely provide connection points for vital control functions such as: smoke detectors, phase monitor, gas controller, economizer, thermostat, DDC control options, and low and high pressure switches. Controller shall also provide an intuitive means to adjust the indoor fan speed through a simple switch and pot adjustment design.
4. Unit shall include a minimum of one 8-pin screw terminal connection board for connection of control wiring.
5. Shall include integrated defrost system to prevent excessive frost accumulation during heating duty, and shall be controlled as follows:
    a. Defrost shall be initiated on the basis of time and coil temperature.
    b. A 30, 60, 90, 120 minute timer shall activate the defrost cycle only if the coil temperature is low enough to indicate a heavy frost condition.
    c. Defrost cycle shall terminate when defrost thermostat is satisfied and shall have a positive termination time of 10 minutes.
6. Defrost system shall also include:
    a. Defrost Cycle Indicator LED.
    b. DIP switch selectable defrost time between 30, 60, 90, and 120 minutes. Factory set at 30 minutes.
    c. Molded plug connection to ensure proper connection.

(23 09 33.13.B.) Safeties:

1. Compressor over-temperature, over-current. High internal pressure differential.
2. Low pressure switch.

    Low pressure switch shall use different color wire than the high pressure switch. The purpose is to assist the installer and service technician to correctly wire and or troubleshoot the rooftop unit.

3. High pressure switch.

    High pressure switch shall use different color wire than the low pressure switch. The purpose is to assist the installer and service technician to correctly wire and or troubleshoot the rooftop unit.

4. Heating section shall be provided with the -following minimum protections:

a. High temperature limit switches.

6. A2L Refrigerant Leak Dissipation System (Electromechanical)

a. Leak dissipation system shall consist of control board and A2L sensor certified to UL 60335-2-40

b. System shall be designed for the life of the unit

c. Dissipation system shall be automatic, ship prewired, and require no additional field connections to thermostat to function

d. Refrigerant leak sensor shall be installed in UL certified location and orientation. Sensor shall be self-correcting and resettable. Single use refrigerant leak sensor shall not be permitted

e. Factory installed dissipation controller shall use onboard microprocessor and include:

1) Automatic reset after a dissipation event has occurred

2) Onboard LED with flash code to indicate current unit status and hardware failures

3) Depressible "Test" button to allow for a system test and recall/reset of leak detection history

4) 24V dry contact alarm terminal to allow for external notification of leak detection

f. Dissipation control board shall be accessible via normal maintenance locations and LED shall be visible

g. Dissipation system shall "Fail Safe" per UL requirements

h. Dissipation shall allow smoke and building fire systems to override in case of event

7. A2L Refrigerant Leak Dissipation System (SystemVu)

a. Leak dissipation system shall consist of control board and A2L sensor certified to UL 60335-2-40, integrated with SystemVu controller

b. System shall be designed for the life of the unit

c. Dissipation system shall be automatic, ship prewired, and require no additional field connections to function

d. Refrigerant leak sensor shall be installed in UL certified location and orientation. Sensor shall be self-correcting and resettable. Single use refrigerant leak sensor shall not be permitted

e. Factory installed dissipation system shall use onboard microprocessor and include:

1) Automatic leak detection and dissipation algorithm

2) Automatic reset after a dissipation event has occurred

3) Onboard LED with flash code to indicate current unit status and hardware failures

4) Depressible "Test" button to allow for a system test and recall/reset of leak detection history

5) 24V dry contact alarm terminal on dissipation control board to allow for external notification of leak detection

6) Ability to notify BAS system of dissipation event via readable alarm point through SystemVu

7) Recallable dissipation alarm history on SystemVu controller

f. Dissipation control board shall be accessible via normal maintenance locations and LED shall be visible

g. Dissipation system shall "Fail Safe" per UL requirements

h. Dissipation shall allow smoke and building fire systems to override in case of event

(23 09 93) Sequence of Operations for HVAC Controls

(23 09 93.13) Decentralized, Rooftop Units:

(23 09 93.13.A.) INSERT SEQUENCE OF OPER-ATION

(23 40 13) Panel Air Filters

(23 40 13.13) Decentralized, Rooftop Units:

(23 40 13.13.A.) Standard filter section:

1. Shall consist of factory installed, low velocity, disposable 2 in. thick fiberglass filters of -commercially available sizes.
2. Unit shall use only one filter size. Multiple sizes are not acceptable.
3. Filters shall be accessible through an access panel with "no-tool" removal as described in the unit cabinet section of this specification (23 81 19.13.G).

(23 81 19) Self-Contained Air Conditioners

(23 81 19.13) Small-Capacity Self-Contained Air Conditioners:

(23 81 19.13.A.) General:

1. Outdoor, rooftop mounted, electrically controlled, heating and cooling unit utilizing a fully hermetic scroll compressor(s) for cooling duty and heat pump heating duty
2. Factory assembled, single-piece heating and cooling rooftop unit. Contained within the unit enclosure shall be all factory wiring, piping, controls, and special features required prior to field start-up.
3. Unit shall use Puron Advance™ (R-454B) refrigerant.
4. Unit shall be installed in accordance with the manufacturer's instructions.
5. Unit must be selected and installed in compliance with local, state, and federal codes.

(23 81 19.13.B.) Quality Assurance:

1. Unit meets DOE and ASHRAE 90.1 minimum efficiency requirements.
2. Unit shall be rated in accordance with AHRI Standards 210/240 (04-06 sizes) or 340/360 (07 size).
3. Unit shall be designed to conform to ASHRAE 15.
4. Unit shall be UL-tested and certified in accordance with ANSI Z21.47 Standards and UL-listed and certified under Canadian standards as a total package for safety requirements.
5. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
6. Unit casing shall be capable of withstanding 500 hour salt spray exposure per ASTM B117 (scribed specimen).
7. Unit shall be designed in accordance with ISO 9001, and shall be manufactured in a facility registered by ISO 9001:2015.
8. Roof curb shall be designed to conform to NRCA Standards.
9. Unit shall be subjected to a completely automated run test on the assembly line. The data for each unit will be stored at the factory, and must be available upon request.
10. Unit shall be designed in accordance with UL Standard 60335-1 and 60335-2-40, including testing to withstand rain. Unit shall be IPX4 rated.
11. Unit shall be constructed to prevent intrusion of snow and tested to prevent snow intrusion into the control box up to 40 mph.
12. Unit shake tested to assurance level 1, ASTM D4169 to ensure shipping reliability.

(23 81 19.13.C.) Delivery, Storage, and Handling:

1. Unit shall be stored and handled per manufacturer's recommendations.

2. Lifted by crane requires either shipping top panel or spreader bars.
3. Unit shall only be stored or positioned in the upright position.

(23 81 19.13.D.) Project Conditions:

1. As specified in the contract.

(23 81 19.13.E.) Operating Characteristics:

1. Unit shall be capable of starting and running at 115°F (46°C) ambient outdoor temperature, meeting maximum load criteria of AHRI Standard 210/240 or 340/360 at ±10% voltage.
2. Compressor with standard controls shall be capable of operation down to 40°F (4°C), ambient outdoor temperatures.
3. Compressor with standard controls shall be capable of operation down to -10°F (-3.9°C) ambient outdoor temperatures or lower in heat pump heating mode.
4. Unit shall discharge supply air vertically or horizontally as shown on contract drawings.
5. Unit shall be factory configured for vertical -supply and return configurations.
6. Unit shall be field convertible from vertical to horizontal airflow on all models. No special kit required.
7. Unit shall be capable of mixed operation: vertical supply with horizontal return or horizontal supply with vertical return.

(23 81 19.13.F.) Electrical Requirements:

1. Main power supply voltage, phase, and frequency must match those required by the manufacturer.

(23 81 19.13.G.) Unit Cabinet:

1. Unit cabinet shall be constructed of galvanized steel, and shall be bonderized and coated with a prepainted baked enamel finish on all externally exposed surfaces.
2. Unit cabinet exterior paint shall be: film thickness, (dry) 0.003 inches minimum, gloss (per ASTM D523, 60°F/16°C): 60, Hardness: H-2H Pencil hardness.
3. Evaporator fan compartment interior cabinet insulation shall conform to AHRI Standards 210/240 or 340/360 minimum exterior sweat criteria. Interior surfaces shall be insulated with a minimum 1/2 in. thick, 1 lb density, flexible fiberglass insulation, neoprene coated on the air side. Aluminum foil-faced fiberglass insulation shall be used in the heat compartment.
4. Base of unit shall have a minimum of 4 locations for thru-the-base gas and electrical connections (factory-installed or field-installed), standard.
5. Base Rail:
    a. Unit shall have base rails on a minimum of 2 sides.
    b. Holes shall be provided in the base rails for rigging shackles to facilitate maneuvering and overhead rigging.
    c. Holes shall be provided in the base rail for moving the rooftop by fork truck.
    d. Base rail shall be a minimum of 16 gauge thickness.
6. Condensate pan and connections:
    a. Shall be a sloped condensate drain pan made of a corrosion resistant material.
    b. Shall comply with ASHRAE Standard 62.
    c. Shall use a 3/4 in. 14 NPT drain connection, possible either through the bottom or side of the drain pan. Connection shall be made per manufacturer's recommendations.
7. Top panel:
    a. Shall be a single piece top panel on all sizes
8. Electrical Connections:

a. All unit power wiring shall enter unit cabinet at a single, factory prepared, knockout location.

b. Thru-the-base capability.

1) Standard unit shall have a thru-the-base electrical location(s) using a raised, embossed portion of the unit basepan.

2) Optional, factory approved, water-tight connection method must be used for thru-the-base electrical connections.

3) No basepan penetration, other than those authorized by the manufacturer, is permitted.

9. Component access panels (standard):

a. Cabinet panels shall be easily removable for servicing.

b. Unit shall have one factory installed, tool-less, removable, filter access panel.

c. Panels covering control box, indoor fan, indoor fan motor, gas components (where applicable), and compressors shall have molded composite handles.

d. Handles shall be UV modified, composite. They shall be permanently attached, and recessed into the panel.

e. Screws on the vertical portion of all removable access panel shall engage into heat resistant, molded composite collars.

f. Collars shall be removable and easily replaceable using manufacturer recommended parts.

H. (23 81 19.13.H.) Coils:

1. Standard Aluminum Fin-Copper Tube Coils:

a. Standard evaporator and condenser coils shall have aluminum lanced plate fins mechanically bonded to seamless internally helical grooved copper tubes with all joints brazed.

b. Evaporator coils shall be leak tested to 150 psig, pressure tested to 450 psig, and qualified to UL 60335-2-40 burst test at 1775 psig.

c. Condenser coils shall be leak tested to 150 psig, pressure tested to 650 psig, and qualified to UL 60335-2-40 burst test at 1980 psig.

2. Optional Pre-coated aluminum-fin condenser coils (3-Phase Models Only):

a. Shall have a durable epoxy-phenolic coating to provide protection in mildly corrosive coastal environments.

b. Coating shall be applied to the aluminum fin stock prior to the fin stamping process to create an inert barrier between the aluminum fin and copper tube.

c. Epoxy-phenolic barrier shall minimize galvanic action between dissimilar metals.

d. Corrosion durability of fin stock shall be confirmed through testing to be no less than 1000 hours salt spray per ASTM B117.

e. Corrosion durability of fin stock shall be confirmed through testing to have no visible corrosion after 48 hour immersion in a room temperature solution of 5% salt, 1% acetic acid.

f. Fin stock coating shall pass 2000 hours of the following: one week exposure in the prohesion chamber followed by one week of accelerated ultraviolet light testing. Prohesion chamber: the solution shall contain 3.5% sodium chloride and 0.35% ammonium sulfate. The exposure cycle is one hour of salt fog application at ambient followed by one hour drying at 95°F (35°C).

3. Optional Copper-fin evaporator and condenser coils (3-Phase Models Only):

a. Shall be constructed of copper fins mechanically bonded to copper tubes and copper tube sheets.

b. Galvanized steel tube sheets shall not be acceptable.

c. A polymer strip shall prevent coil assembly from contacting the sheet metal coil pan to minimize potential for galvanic corrosion between coil and pan.

4. Optional E-coated aluminum-fin evaporator and condenser coils (3-Phase Models Only):

a. Shall have a flexible epoxy polymer coating uniformly applied to all coil surface areas without material bridging between fins.

b. Coating process shall ensure complete coil encapsulation of tubes, fins and headers.

c. Color shall be high gloss black with gloss per ASTM D523.

d. Uniform dry film thickness from 0.8 to 1.2 mil on all surface areas including fin edges.

e. Superior hardness characteristics of 2H per ASTM D3363 and cross-hatch adhesion of 4B-5B per ASTM D3359.

f. Impact resistance shall be up to 160 in. lb (ASTM D2794).

g. Humidity and water immersion resistance shall be up to minimum 1000 and 250 hours respectively (ASTM D2247 and ASTM D870).

h. Corrosion durability shall be confirmed through testing to be no less than 1000 hours salt spray per ASTM B117.

I.(2381 19.13.I.) Refrigerant Components:

1. Refrigerant circuit shall include the following control, safety, and maintenance features:

a. Fixed orifice metering system on 04-06 models and TXV on 07 size models shall include a multiple feed distribution system that optimizes coil performance.

b. Refrigerant filter drier — Solid core design with pre and post filter service gauge connections for filter diagnostics and maintenance

c. Service gauge connections on suction and discharge lines.

d. Pressure gauge access through a specially designed access port in the unit.

e. Suction line accumulator to provide protection in all operating modes from cooling, heating and reverse cycle switching.

2. There shall be gauge line access port in the skin of the rooftop, covered by a black, removable plug.

a. The plug shall be easy to remove and replace.

b. When the plug is removed, the gauge access port shall enable maintenance personnel to route their pressure gauge lines.

c. This gauge access port shall facilitate correct and accurate condenser pressure readings by enabling the reading with the compressor access panel on.

d. The plug shall be made of a leak proof, UV-resistant, composite material.

3. Compressors:

a. Unit shall use fully hermetic, scroll compressor.

b. Compressor motors shall be cooled by refrigerant gas passing through motor windings.

c. Compressors shall be internally protected from high discharge temperature conditions.

d. Compressors shall be protected from an over-temperature and over-amperage conditions by an internal, motor overload device.

e. Compressor shall be factory mounted on rubber grommets.

f. Compressor motors shall have internal line break thermal, current overload and high pressure differential protection.

g. Crankcase heaters shall not be required for normal operating range, unless required by compressor manufacturer due to refrigerant charge limits.

h. Compressor on 04-06 models shall be of a single stage cooling capacity design and 07 models shall be a 2 stage cooling capacity design.

J.(23 81 19.13.J.) Filter Section:

1. Filters access is specified in the unit cabinet section of this specification.
2. Filters shall be held in place by a pivoting filter tray, facilitating easy removal and installation.
3. Shall consist of factory installed, low velocity, throw-away 2 in. thick fiberglass filters.
4. Filters shall be standard, commercially available sizes.
5. Only one size filter per unit is allowed.

K.(23 81 19.13.K.) Evaporator Fan and Motor with EcoBlue™ Technology:

1. Direct Drive Evaporator fan motor:
   a. Shall be an ECM motor design.
   b. Shall be direct drive design for all static options.
   c. Shall have permanently lubricated bearings.
   d. Shall have inherent automatic-reset thermal overload protection.
   e. Shall have slow ramp up to speed capabilities.
   f. Shall require no fan/motor belts for operation, adjustments and or initial fan speed setup.
   g. Fan DC voltage set up on Unit Control Board shall eliminate the need of removal of blower access door, required on conventional belt drive systems.
   h. Shall be internally protected from electrical phase reversal.
2. Evaporator Fan:
   a. Speed shall be easily set with dedicated selection switch and adjustment pot on unit control board or through SystemVu™ controller.
   b. On sizes 04-06 single speed indoor fan operation provided and on 07 size model with 2 stage cooling capacity control, the indoor fan speed is automatically controlled to meet the code-compliant 66% low fan speed and 100% at full fan speed operation.
   c. Blower fan shall be a Vane Axial fan design with fan assembly secured directly to ECM motor. Additional shafts, belts, pulleys/sheaves, and bearing blocks to drive fan shall not be permitted or necessary.
   d. Additional variable frequency drive to control fan motor speed shall not be permitted or necessary. All speed control electronics must be onboard fan motor assembly.
   e. Shall be constructed of a cast aluminum stator and high impact composite material on rotor and air inlet casing.
   f. Shall be a patented / pending design with a corrosion resistant material.
   g. Fan assembly design shall be integrated to fan deck, dynamically balanced, and require no additional vibration isolation for normal operation.
   h. Shall have slow ramp up to speed capabilities to help reduce sound and comfort issues typically associated with single speed belt drive systems.
   i. Shall be a slide out design with 2 screw removal.
3. Shall include an easily accessible Unit Control Board to conveniently and safely provide connection points for vital control functions such as: smoke detectors, phase monitor, gas controller, economizer, thermostat, DDC control options, and low and high pressure switches. Controller shall also provide an intuitive means to adjust the indoor fan speed through a simple switch and pot adjustment design.

L.(23 81 19.13.L.) Condenser Fans and Motors:

1. Condenser fan motors:

a. Shall be a totally enclosed motor.

b. Shall use permanently lubricated bearings.

c. Shall have inherent thermal overload protection with an automatic reset feature.

d. Shall use a shaft-down design on all sizes.

2. Condenser Fans:

a. Shall be a direct-driven propeller type fan constructed of high impact composite mate-rial.

b. Shall have high impact composite blades completely formed into one piece without blade fasteners or connectors and shall be dynamically balanced.

M. (23 81 19.13.M.) Special Features Options and Accessories:

1. Integrated EconomizerONE and EconoMi$er® 2 low leak rate models.

a. Integrated, gear driven opposing modulating blade design type capable of simultaneous economizer and compressor operation.

b. Independent modules for vertical or horizontal return configuration shall be available. Vertical return modules shall be available as a factory installed option.

c. Damper blades shall be galvanized steel with composite gears. Plastic or composite blades on intake or return shall not be acceptable.

d. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below set points.

e. Shall be equipped with gear driven dampers for both the outdoor ventilation air and the return air for positive air stream control.

f. Low leak rate shall be equipped with dampers not to exceed 2% leakage at 1 in. wg pressure differential.

g. Economizer controller on EconomizerONE models shall be the Siemens POL224 that provides:

1) Combined minimum and DCV maximum damper position potentiometers with compressor staging relay.

2) Optional configuration via WLAN stick and Siemens Climatix™ smartphone app for easy setup.

3) Functions with solid-state analog enthalpy or dry bulb changeover control sensing.

4) LED indication for free cooling, sensor, and damper operation.

5) One-line LCD interface screen for setup, configuration and troubleshooting.

6) On-board Fault Detection and Diagnostics (FDD) that senses and alerts when the economizer is not operating properly, per California Title 24, ASHRAE 90.1 and IECC®.

7) Sensor failure loss of communication identification.

8) Capabilities for use with multiple-speed or single speed indoor fan systems.

9) Digital sensors: Dry bulb and Enthalpy.

h. Economizer controller on EconoMi$er® 2 models with SystemVu controllers shall be a 4-20mA design controlled directly by the controller. SystemVu controllers meet California Title 24, ASHRAE 90.1 and IECC Fault Detection and Diagnostic (FDD) requirements.

i. Shall be capable of introducing up to 100% outdoor air.

j. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air and contain seals that meet ASHRAE 90.1 requirements.

k. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.

l. Dry bulb outdoor air temperature sensor shall be provided as standard. Enthalpy sensor is also available on factory

installed only. Outdoor air sensor set point shall be adjustable and shall range from 40°F to 100°F (4°C to 38°C). Additional sensor options shall be available as accessories.

m. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 100%, with a range of 0% to 100%.

n. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy.

o. Dampers shall be completely closed when the unit is in the unoccupied mode.

p. Economizer controller shall accept a 0 to 10 vdc CO_2 sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor air damper to provide ventilation based on the sensor input.

q. Compressor lockout temperature on POL224 control is adjustable from –45°F to 80°F (–43 to 26°C), set at a factory default of 32°F (0°C).

r. Actuator shall be direct coupled to economizer gear. No linkage arms or control rods shall be acceptable.

s. Contains LED indication for free cooling, sensor, and damper operation.

2. Integrated EconomizerONE and EconoMi$er® 2 Ultra Low Leak rate models.

a. Integrated, gear driven opposing modulating blade design type capable of simultaneous economizer and compressor operation.

b. Independent modules for vertical or horizontal return configuration shall be available. Vertical return modules shall be available as a factory-installed option.

c. Damper blades shall be galvanized steel with composite gears. Plastic or composite blades on intake or return shall not be acceptable.

d. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below set points.

e. Shall be equipped with gear driven dampers for both the outdoor ventilation air and the return air for positive air stream control.

f. Ultra Low Leak design meets California Title 24 section 140.4 and ASHRAE 90.1 requirements for 4 cfm per sq ft on the outside air dampers and 10 cfm per sq ft on the return dampers.

g. Economizer controller on EconomizerONE models shall be the Siemens POL224 that provides:

1) One-line LCD interface screen for setup, configuration and troubleshooting.

2) Optional configuration via WLAN stick and Siemens Climatix™ smartphone app for easy setup.

3) On-board Fault Detection and Diagnostics (FDD) that senses and alerts when the economizer is not operating properly, per California Title 24, ASHRAE 90.1 and IECC.

4) Sensor failure loss of communication identification.

5) Capabilities for use with multiple-speed indoor fan systems.

6) Digital sensors: Dry bulb and Enthalpy.

h. Economizer controller on EconoMi$er® 2 models with SystemVu controls shall be a 4 to 20mA design controlled directly by the controller. SystemVu meet California Title 24, ASHRAE 90.1 and IECC Fault Detection and Diagnostic (FDD) requirements.

i. Shall be capable of introducing up to 100% outdoor air.

j. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air and contain seals that meet ASHRAE 90.1 requirements.

k. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.

l. Dry bulb outdoor air temperature sensor shall be provided as standard. Enthalpy sensor is also available on factory

installed only. Outdoor air sensor set point shall be adjustable and shall range from 40°F to 100°F (4°C to 38°C). Additional sensor options shall be available as accessories.

m. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 100%, with a range of 0% to 100%.

n. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy.

o. Dampers shall be completely closed when the unit is in the unoccupied mode.

p. Economizer controller shall accept a 0 to 10 vdc CO_2 sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor air damper to provide ventilation based on the sensor input.

q. Compressor lockout temperature on POL224 control is adjustable from –45°F to 80°F (–43 to 26°C), set at a factory default of 32°F (0°C).

r. Actuator shall be direct coupled to economizer gear. No linkage arms or control rods shall be acceptable.

s. Contains LED indication for free cooling, sensor, and damper operation.

3. Wi-Fi/WLAN stick for EconomizerONE POL224 (field-installed):

This item allows use of the Siemens Climatix™ mobile application.

4. Two-Position Damper (Field-installed only):

a. Damper shall be a Two-Position Damper. Damper travel shall be from the full closed position to the field adjustable%-open set-point.

b. Damper shall include adjustable damper travel from 25% to 100% (full open).

c. Damper shall include single or dual blade, gear driven dampers and actuator motor.

d. Actuator shall be direct coupled to damper gear. No linkage arms or control rods shall be acceptable.

e. Damper will admit up to 100% outdoor air for applicable rooftop units.

f. Damper shall close upon indoor (evaporator) fan shutoff and/or loss of power.

g. The damper actuator shall plug into the rooftop unit's wiring harness plug. No hard wiring shall be required.

h. Outside air hood shall include aluminum water entrainment filter.

5. Manual damper (Field-installed only):

Manual damper package shall consist of damper, air inlet screen, and rain hood which can be preset to admit up to 25 or 50% outdoor air for year round ventilation.

6. Low Ambient Control Package:

a. Controller shall control coil head pressure by condenser fan speed modulation or condenser fan cycling and wind baffles.

b. Shall consist of solid-state control and condenser coil temperature sensor to maintain condensing temperature between 90°F (32°C) and 110°F (43°C) at outdoor ambient temperatures down to –20°F (–29°C). For full low ambient control range, winter start kit is required.

7. Condenser Coil Hail Guard Assembly (Factory or field installed on 3-Phase Models Only. Field-installed on all 3 and 1-Phase Models.)

a. Shall protect against hail and additional coil damage.

b. Shall be louvered type

8. Unit-Mounted, Non-Fused Disconnect Switch (Available on units with FLA of 80 amps or less)

a. Switch shall be factory installed, internally mounted.

b. National Electric Code (NEC) and UL approved non-fused switch shall provide unit power shutoff.

c. Shall be accessible from outside the unit.

d. Shall provide local shutdown and lockout capability.

e. Sized **only** for the unit as ordered from the factory. Does not accommodate field-installed devices.

9. Convenience Outlet:

a. Factory Installed Powered convenience outlet. (3-Phase Models Only)

1) Outlet shall be powered from main line power to the rooftop unit.

2) Outlet shall be powered from line side or load side of disconnect by installing contractor, as required by code. If outlet is powered from load side of disconnect, unit electrical ratings shall be UL certified and rated for additional outlet amperage.

3) Outlet shall be factory-installed and internally mounted with easily accessible 115-v female receptacle.

4) Outlet shall include 15 amp GFI receptacles with independent fuse protection.

5) Voltage required to operate convenience outlet shall be provided by a factory installed step-down transformer.

6) Outlet shall be accessible from outside the unit.

7) Outlet shall include a field installed "Wet in Use" cover.

b. Factory-Installed Non-Powered convenience outlet.

1) Outlet shall be powered from a separate 115/120v power source.

2) A transformer shall not be included.

3) Outlet shall be factory-installed and internally mounted with easily accessible 115-v female receptacle.

4) Outlet shall include 15 amp GFI receptacles with independent fuse protection.

5) Outlet shall be accessible from outside the unit.

6) Outlet shall include a field installed "Wet in Use" cover.

c. Field-Installed Non-Powered convenience outlet.

1) Outlet shall be powered from a separate 115/120v power source.

2) A transformer shall not be included.

3) Outlet shall be field-installed and internally mounted with easily accessible 115-v female receptacle.

4) Outlet shall include 20 amp GFI receptacles. This kit provides a flexible installation method which allows code compliance for height requirements of the GFCI outlet from the finished roof surface as well as the capability to relocate the outlet to a more convenient location.

5) Outlet shall be accessible from outside the unit.

6) Outlet shall include a field installed "Wet in Use" cover.

10. Thru-the-Base Connectors:

a. Kits shall provide connectors to permit gas and electrical connections to be brought to the unit through the unit basepan.

b. Minimum of 4 connection locations per unit.

11. Propeller Power Exhaust:

a. Power exhaust shall be used in conjunction with an integrated economizer.

b. Independent modules for vertical or horizontal return configurations shall be available.

c. Horizontal power exhaust shall be mounted in return ductwork.

d. Power exhaust shall be controlled by economizer controller operation. Exhaust fans shall be energized when dampers open past the 0 to 100% adjustable setpoint on the economizer control.

12. Roof Curbs (Vertical):

a. Full perimeter roof curb with exhaust capability providing separate air streams for energy recovery from the exhaust air without supply air contamination.

b. Formed galvanized steel with wood nailer strip and shall be capable of supporting entire unit weight.

c. Permits installation and securing of ductwork to curb prior to mounting unit on the curb.

13. Outdoor Air Enthalpy Sensor:

The outdoor air enthalpy sensor shall be used to provide single enthalpy control. When used in conjunction with a return air enthalpy sensor, the unit will provide differential enthalpy control. The sensor allows the unit to determine if outside air is suitable for free cooling.

14. Return Air Enthalpy Sensor:

The return air enthalpy sensor shall be used in conjunction with an outdoor air enthalpy sensor to provide differential enthalpy control.

15. Indoor Air Quality (CO_2) Sensor:

a. Shall be able to provide demand ventilation indoor air quality (IAQ) control.

b. The IAQ sensor shall be available in duct mount, wall mount, or wall mount with LED display. The setpoint shall have adjustment capability.

16. Smoke detectors:

a. Shall be a 4-Wire Controller and Detector.

b. Shall be environmental compensated with differential sensing for reliable, stable, and drift-free sensitivity.

c. Shall use magnet-activated test/reset sensor switches.

d. Shall have tool-less connection terminal access.

e. Shall have a recessed momentary switch for testing and resetting the detector.

f. Controller shall include:

1) One set of normally open alarm initiation contacts for connection to an initiating device circuit on a fire alarm control panel.

2) Two Form-C auxiliary alarm relays for interface with rooftop unit or other equipment.

3) One Form-C supervision (trouble) relay to control the operation of the Trouble LED on a remote test/reset station.

4) Capable of direct connection to 2 individual detector modules.

5) Can be wired to up to 14 other duct smoke detectors for multiple fan shutdown applications.

17. Winter Start Kit:

a. Shall contain a bypass device around the low pressure switch.

b. Shall be required when mechanical cooling is required below 40°F (4°C).

c. Shall not be required to operate an economizer for cooling when below an outdoor ambient of 40°F (4°C).

d. Is not compatible with SystemVu controls

18. Time Guard:

a. Shall prevent compressor short-cycling by providing a 5-minute delay (±2 minutes) before restarting a compressor after shutdown for any reason.

b. One device shall be required per compressor.

19. Hinged Access Panels:

a. Shall provide easy access through integrated quarter turn latches.

b. Shall be on major panels of: filter, control box, fan motor, and compressor.

20. Condensate overflow switch:

This sensor and related controller monitors the condensate level in the drain pan and shuts down compression operation when overflow conditions occur. It includes:

a. Indicator light — solid red (more than 10 seconds on water contact — compressors disabled), blinking red (sensor disconnected).

b. 10 second delay to break — eliminates nuisance trips from splashing or waves in pan (sensor needs 10 seconds of constant water contact before tripping).

c. Disables the compressor(s) operation when condensate plug is detected, but still allows fans to run for Economizer.

21. MERV-13 – 4 in. Return Air filters (Factory Installed Only):

a. Factory option to upgrade standard unit filters to 4" MERV-13 filters

b. Upgraded option shall include factory installed 4" filter rack

c. Shall not be compatible with horizontal units with field installed economizers

d. Shall not be compatible with single phase units

22. 4 in. Return Air Rack (Field Installed Only):

a. Accessory kit is designed to hold 4 in. MERV-8 or MERV-13 filters. Filters not included in kit.

b. Shall not be compatible with horizontal units with field installed economizers

23. 2 in. MERV-13 Return Air filters:

a. Accessory kit to field upgrade standard unit filters to 2 in. MERV-13 filters.

b. Correct size and quantity of filters shall ship in a single box

24. 2 in. MERV-8 Return Air filters:

a. Accessory kit to field upgrade standard unit filters to 2 in. MERV-8 filters.

b. Correct size and quantity of filters shall ship in a single box

25. Phase Monitor Control:

a. Shall monitor the sequence of 3-phase electrical system to provide a phase reversal protection.

b. Shall monitor the 3-phase voltage inputs to provide a phase loss protection for the 3-phase device.

c. Will work on either a Delta or Wye power connection.

26. Horn/Strobe Annunciator:

a. Provides an audible/visual signaling device for use with factory-installed option or field installed accessory smoke detectors.

b. Requires installation of a field-supplied 24-v transformer suitable for 4.2 VA (AC) or 3.0 VA (DC) per horn/strobe accessory.

c. Requires field-supplied electrical box, North American 1-gang box, 2 in. (51 mm) x 4 in. (102 mm).

d. Shall have a clear colored lens.

27. Electric Heat (Accessory Only):

a. Heating Section:

1) Heater element open coil resistance wire, nickel-chrome alloy, 0.29-in. inside diameter, strung through ceramic insulators mounted on metal frame. Coil ends are staked and welded to terminal screw slots.

1) Heater assemblies are provided with integral fusing for protection of internal heater circuits. Auto reset thermo limit controls, magnetic heater contactors (24-v coil) and terminal block all mounted in electric heater control box (minimum 18 ga galvanized steel) attached to end of heater assembly.

28. High Short Circuit Current Rating (SCCR) Protection:

a. Factory-installed option shall provide high short circuit current protection to compressor and all indoor and outdoor fan motors rated at 10 kA against high potential fault current situations. (Standard unit comes with 5 kA rating.)

b. This option is not available with factory installed powered convenience outlet, Non-Fused Disconnect, Low Ambient controls, Phase loss monitor/protection and 575 Volt models .

29. Service Option:

a. Side Filter Hinge Door

1) Factory-installed option provides hinged filter access through the unit return air side duct panel. Not included with standard hinged panels option.

b. Lifting Lug

1) Factory-installed option provides lifting lug to one corner of the unit base rail via additional support. This option supports ground assembly of unit options or accessories (ex. Economizer hood) by spacing lifting materials further from the unit cabinet.

c. 2" MERV-8 or MERV-13 Filters

1) Replaces the standard factory throw-away filters with upgraded 2" MERV-8 or MERV-13 filters.

d. Non-powered Convenience Outlet

1) Outlet shall be powered from a separate 115/120v power source.

2) A transformer shall not be included.

3) Outlet shall be factory-installed and internally mounted with easily accessible 115-v female receptacle.

4) Outlet shall include 15 amp GFI receptacles with independent fuse protection.

5) Outlet shall be accessible from outside the unit.

6) Outlet shall include a field installed "Wet in Use" cover.

e. Hinged Panels

1) Shall provide easy access through integrated quarter turn latches.

2) Shall be on major panels of: filter, control box, fan motor, and compressor.

WeatherMaker® with ecoblue™ technology

PURON ADVANCE ™ PACKAGED ROOFTOP HEAT PUMP UNITS WITH OPTIONAL ACCESSORY ELECTRIC HEAT 3, 4, 5 TONS – 13.4 SEER2, 6 TON – 15.0 IEER

50FEQ units are single-packaged heat pump units with optional accessory electric heat. All units are prewired and pre-charged with Carrier's new, low global warming potential Puron Advance™ (R-454B) refrigerant. Puron Advance represents a 75% reduction in refrigerant GWP over legacy Puron™ (R-410A) models. All units are factory tested in both heating and cooling modes. 3–5-ton models use single stage cooling capacity control. 6-ton models use two stage cooling capacity control.



ASHRAE 90.1 COMPLIANT

c UL us

AHRI CERTIFIED

Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program For verification of certification for individual products, go to www.ahridirectory.org.

Puron ADVANCE™

PERFORMANCE FEATURES

- Puron Advance (R-454B) refrigerant
- Single-stage cooling capacity 04-06 models, Two Stage on 07 models
- SEER2s up to 13.4, HSPF2 up to 6.7
- IEERs up to 15.0, COP up to 3.4
- New - A2L leak detection and dissipation system factory installed standard
- Leak system ensures unit and occupant safety during operation and includes an alarm relay for optional use
- Onboard recallable leak detection history for easier troubleshooting and service
- Direct Drive – EcoBlue™ Technology Indoor fan system uses Vane Axial fan design and electronically commutated motor
- New Unit Control Board with intuitive quick fan speed adjustment
- Copper tube aluminum fin coils with optional coating
- Sound levels as low as 75 dB
- Exclusive non-corrosive composite condensate pans in accordance with ASHRAE 62 Standard, sloping design; side or center drain
- Pre-painted exterior panels and primer-coated interior panels tested to 500 hours salt spray protection
- Acutrol™ refrigerant metering system on 04-06 models, TXV on 07 size models
- Standard cooling operating range up to 115°F (46°C), and down to 40°F (4°C). Low Ambient allows cooling operation down to -20°F (-29°C).
- Rated in accordance with AHRI Standards 210/240 (04-06 sizes) and 340/360 (07 size)
- Designed in accordance with Underwriters' Laboratories Standard UL 60335-1 and UL 60335-2-40
- Listed by UL and CUL-Canada

MAINTENANCE FEATURES

- Access panels with easy grip handles
- Innovative, easy starting, no-strip screw feature on unit access panels
- Two-inch disposable return air filters
- Tool-less filter access door
- New central terminal board facilitating simple safety circuit troubleshooting and simplified control box arrangement

INSTALLATION FEATURES

- Field Convertible from vertical to horizontal airflow on all models. No special kit required.
- Provisions for thru-the-bottom power entry capability
- Single point electric connections
- Full perimeter base rail with built-in rigging adapters and fork truck slots
- Two stage cooling thermostats required on 07 size to help provide energy saving and comfort benefits.

STANDARD LIMITED PARTS WARRANTY

- 5-year compressor parts
- 5-year electric heater
- 3-year SystemVu™ controller
- 1-year parts

AVAILABLE OPTIONS:

- Through the base connections for electric available as option
- Disconnect and convenience outlet options
- Medium and High static motor options
- Smoke detector, supply and/or return air
- Corrosion resistant options for evaporator and condenser coils
- CO2 Sensor
- Phase Monitor Protection
- 4" MERV-13 Filters
- Accessory electric heat
- 2-position damper
- Hinged access panels
- Integrated economizer system. Low and ULTRA Low Leak versions.
- Condensate overflow switch
- SystemVu Controls